


شکل ۱-۱. ترمینال‌های پشت رله

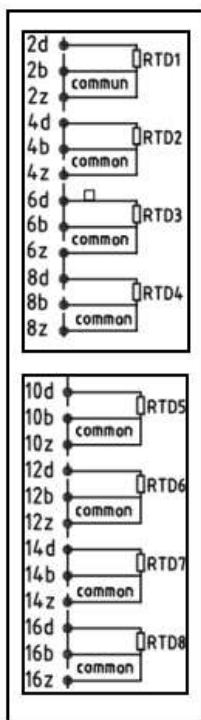

Common output 4	1	2	Common output 1
Output 4 (NC)	3	4	Output 1 (NC)
Output 4 (NO)	5	6	Output 1 (NO)
Common output 5	7	8	Common output 2
Output 5 (NC)	9	10	Output 2 (NC)
Output 5 (NO)	11	12	Output 2 (NO)
Input 3 +	13	14	Common output 3
Input 3 -	15	16	Output 3 (NC)
Input 4 +	17	18	Output 3 (NO)
Input 4 -	19	20	
Input 5 +	21	22	Input 1 +
Input 5 -	23	24	Input 1 -
Input 6 +	25	26	Input 2 +
Input 6 -	27	28	Input 2 -

Case earth	29	30	RS485 (resistance)
RS485 (-)	31	32	RS485(+)
Vaux +	33	34	Vaux -
Relay failed	35	36	Common WD
Relay healthy	37	38	
Voltage input VA	39	40	Voltage input VC
Current input IA (5A)	41	42	Current input IA (5A)
Current input IB (5A)	43	44	Current input IB (5A)
Current input IC(5A)	45	46	Current input IC(5A)
Current input Ie (5A)	47	48	Current input Ie (5A)
Current input IA (1A)	49	50	Current input IA (1A)
Current input IB (1A)	51	52	Current input IB (1A)
Current input IC(1A)	53	54	Current input IC(1A)
Current input Ie (1A)	55	56	Current input Ie(1A)

جدول ۱-۱. ترمینال‌های پشت رله